

BNC-to-VGA Converter VC-1BAQ

*Converts most LCD monitors into security monitors.
The converter allows displays with a VGA input to
display video signals coming from a BNC connector.*


Features:

- ▶ Now with a VESA mount.
- ▶ NTSC or PAL compatible.
- ▶ Gold-plated BNC connector.
- ▶ Video input auto-configure.
- ▶ On-screen display (OSD) functions: color, contrast, tint and brightness.
- ▶ Compact size, perfect for plug and play installation.



Sample Application:


5VDC Power Adapter
(Included)

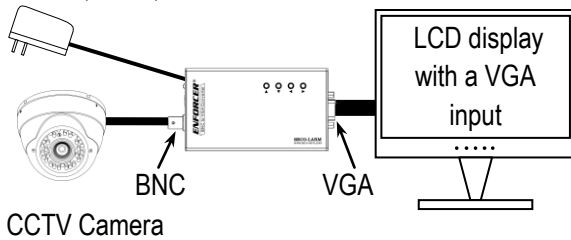

Now with VESA Mount


For mounting to LCD monitors with or without mounting arms.

Applications Using a Monitor Stand



Mount with 4 screws for
monitors sitting on stands.

Applications Using a Mounting Arm



Mount with 2 screws for
monitors using mounting arms.

Specifications:

Input signal	Composite video 1Vp-p 75ohm BNC jack
Output signal	VGA: 0.7 Vp-p RGB, 15 pin female D-sub
Current consumption	200mA@5VDC
Maximum resolution	NTSC: 720x480, PAL: 720x576
Power source	500mA@5VDC, 2.5mm jack (adapter included)
Dimensions	5 ³ / ₄ " x 2 ¹¹ / ₁₆ " x 1 ¹ / ₈ " (145 x 67 x 27.5mm)
Weight	7.8-oz (220g)

SECO-LARM
16842 Millikan Avenue
Irvine, CA 92606

Tel: 1-949-261-2999
1-800-662-0800
Fax: 1-949-261-7326

Web: www.seco-larm.com
Email: info@seco-larm.com



Copyright © 2011
SECO-LARM U.S.A., Inc.
All rights reserved